




Three-phase hermetically sealed type
oil-immersed shunt reactor
30-148kVAr, 20.5kV, YN

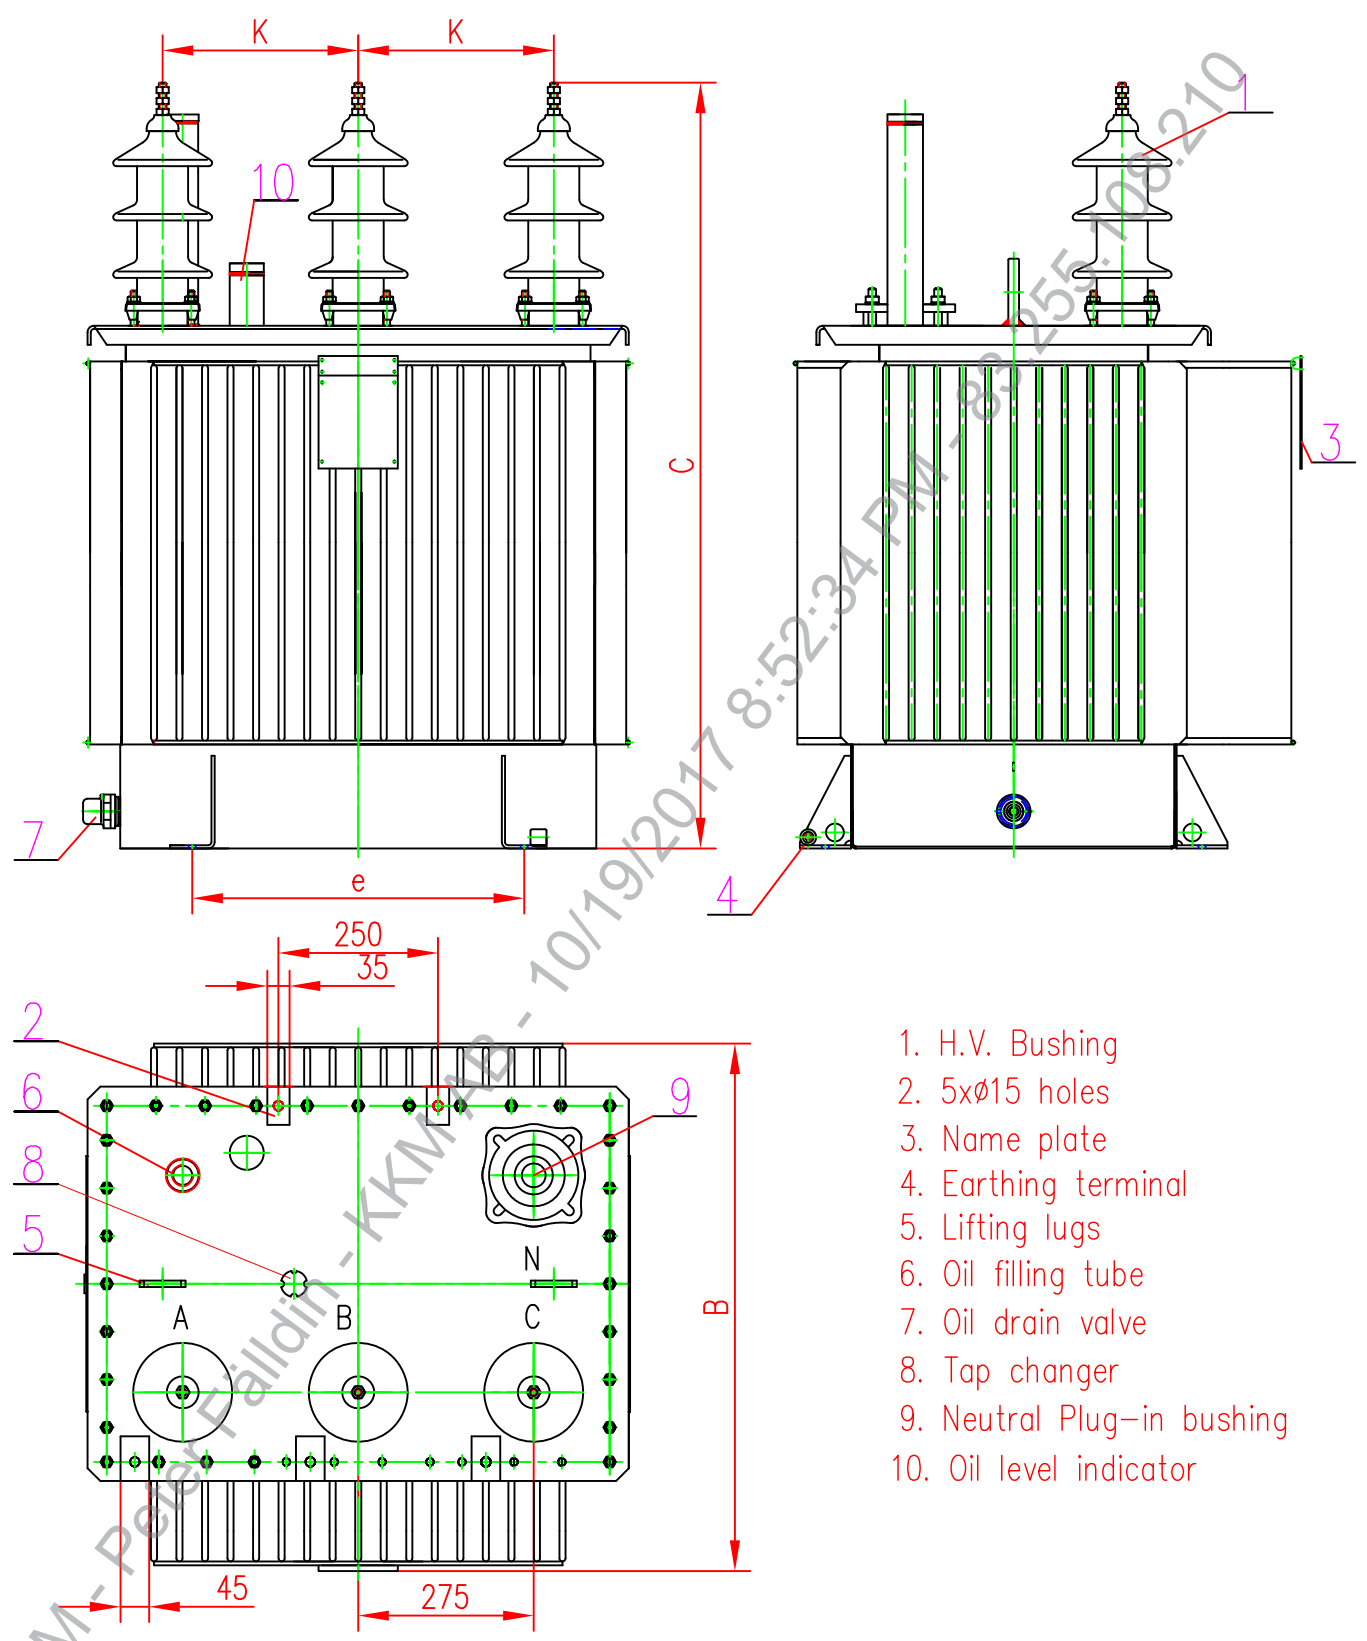

- 1. H.V. Bushing
- 2. 5xØ15 holes
- 3. Name plate
- 4. Earthing terminal
- 5. Lifting lugs
- 6. Oil filling tube
- 7. Oil drain valve
- 8. Tap changer
- 9. Neutral Plug-in bushing
- 10. Oil level indicator

kVAr	A	B	C	d	e	g	l	m	k		n		Mass(kg)	
									H.V.	L.V.	H.V.	L.V.	Oil	Total
30-148	885	905	1300	-	-	-	-	-	275	-	385	-	235	1190

DIMENSIONAL DRAWING

SHR 8-20,5 2,5-12,5A

*Note: dimensions and masses are approximate