




Three-phase hermetically sealed type  
oil-immersed shunt reactor  
30-148kVAr, 20.5kV, YN

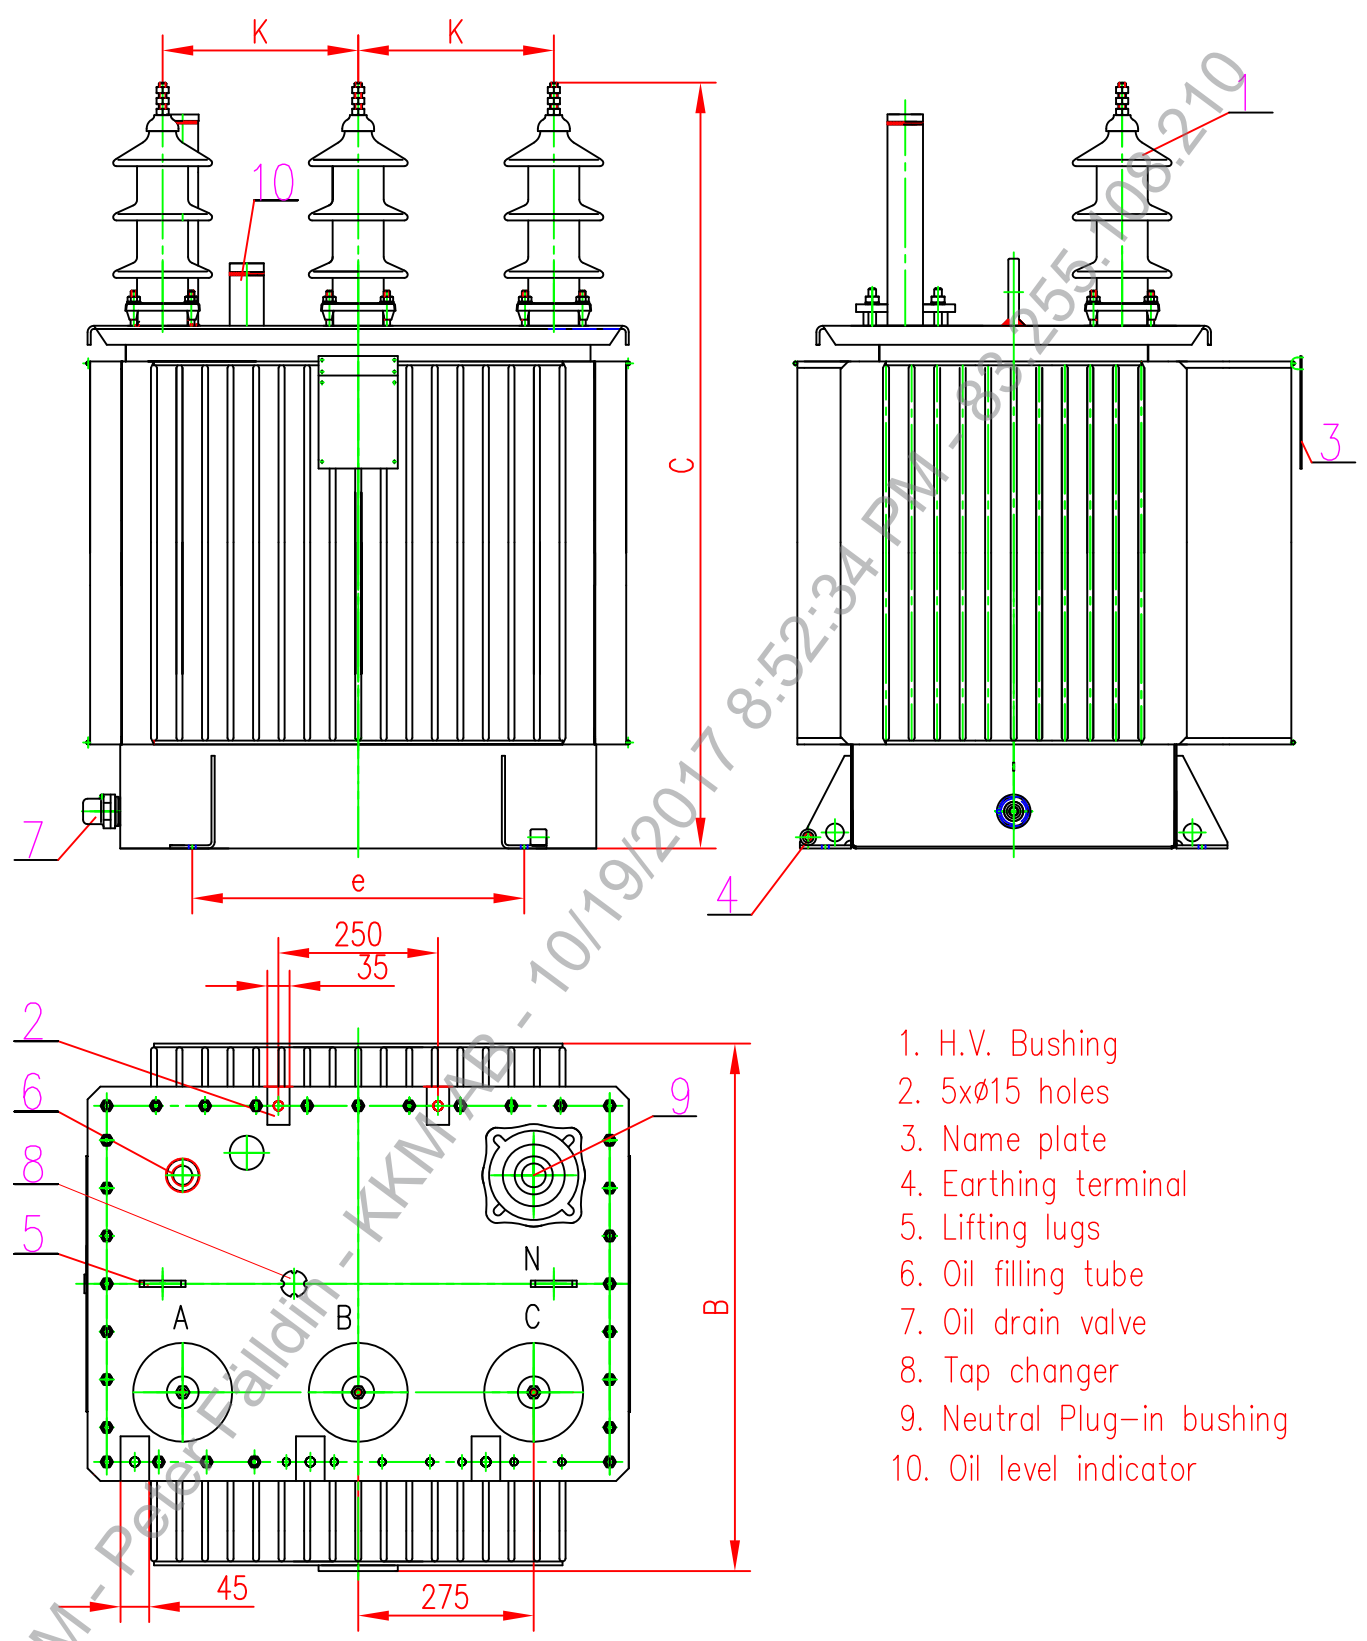

1. H.V. Bushing
2. 5x $\phi$ 15 holes
3. Name plate
4. Earthing terminal
5. Lifting lugs
6. Oil filling tube
7. Oil drain valve
8. Tap changer
9. Neutral Plug-in bushing
10. Oil level indicator

kVAr	A	B	C	d	e	g	l	m	k		n		Mass(kg)	
									H.V.	L.V.	H.V.	L.V.	Oil	Total
30-148	885	905	1300	-	-	-	-	-	275	-	385	-	235	1190

DIMENSIONAL DRAWING

SHR 8-20,5 2,5-12,5A

\*Note: dimensions and masses are approximate